

### Performance

|                                |                |  |
|--------------------------------|----------------|--|
| Platform Height—Elevated       |                |  |
| 1930ES                         | 5.72 m         |  |
| 2032ES                         | 6.10 m         |  |
| 2632ES                         | 7.77 m         |  |
| 2646ES                         | 7.92 m         |  |
| 3246ES                         | 9.68 m         |  |
| Platform Capacity              |                |  |
| 1930ES                         | 230 kg         |  |
| 2032ES                         | 360 kg         |  |
| 2632ES                         | 230/360 kg     |  |
| 2646ES                         | 450 kg         |  |
| 3246ES                         | 320/450 kg     |  |
| Capacity on Platform Extension |                |  |
|                                | 120 kg         |  |
| Lift/Lower Time                |                |  |
| 1930ES                         | 26/30 seconds  |  |
| 2032ES                         | 28/40 seconds  |  |
| 2632ES                         | 33/37 seconds  |  |
| 2646ES                         | 41/50 seconds  |  |
| 3246ES                         | 55/62 seconds  |  |
| Maximum Drive Height           |                |  |
|                                | Fully Elevated |  |
| Weight*                        |                |  |
| 1930ES                         | 1,575 kg       |  |
| 2032ES                         | 2,000 kg       |  |
| 2632ES                         | 2,145 kg       |  |
| 2646ES                         | 2,765 kg       |  |
| 3246ES                         | 2,940 kg       |  |
| Drive Speed—Elevated           |                |  |
|                                | 0.8 km/h       |  |
| Drive Speed—Lowered            |                |  |
| 1930ES                         | 4.82 km/h      |  |
| 2032ES/ 2632ES                 | 4.43 km/h      |  |
| 2646ES/ 3246ES                 | 4.00 km/h      |  |
| Gradeability                   |                |  |
|                                | 25%            |  |
| Turning Radius (Inside)        |                |  |
|                                | Zero           |  |
| Turning Radius (Outside)       |                |  |
| 1930ES                         | 1.75 m         |  |
| 2032ES/ 2632ES                 | 2.06 m         |  |
| 2646ES/ 3246ES                 | 2.41 m         |  |

\* Certain options or country standards will increase weight.

### Standard Specifications

#### Power Source

|           |                  |     |
|-----------|------------------|-----|
| Batteries | 4x6V 220 amp-hr  |     |
| Charger   | 20 Amp Automatic |     |
| Drive     | 24V Electric     | 8hp |

#### Hydraulic Reservoir

- Capacity
 

|                      |        |
|----------------------|--------|
| 1930ES/2032ES/2632ES | 4.73 L |
| 2646ES/3246ES        | 6.4 L  |
- Pump
 

|                         |
|-------------------------|
| Fixed Displacement Gear |
|-------------------------|

#### Tyres

- Tyre Size/Type
 

|                             |                                |
|-----------------------------|--------------------------------|
| 1930ES                      | 12.5 x 4 in. Non-Marking Solid |
| 2032ES/2632ES/2646ES/3246ES | 16 x 5 in. Non-Marking Solid   |

#### Brakes

- Electric/Friction



### Standard Features

- Proportional Controls
- Industry Leading Duty Cycles
- Self Closing and Locking Gate
- Battery Condition Indicator
- Fold-Down Guard Rails<sup>1</sup>
- Slide-Out Battery Trays
- Automatic Traction Control (ATC)
- All Motion Alarm
- 20 Amp Automatic SCR Charger
- Horn
- Hourmeter
- Manual Descent Pull Cable
- Tilt Alarm and Light
- Moveable, Removable Platform Control
- Powder-Coated
- Console with Rail Mounting Bracket
- Nickel Plated Pins
- Lubrication Free Scissor Arm Bushings
- Scissor Maintenance Prop
- Mechanised Pothole Protection
- Machine Tie Downs
- Fork Lift Pockets, Lift from Side and Rear
- Flashing Amber Beacon
- Load Sensing System
- Lifting Lugs


### Accessories & Options

- AC Outlet in Platform
- White Noise (squawker) Motion Alarm
- AGM Batteries
- Airline to Platform
- Special Hydraulic Oils
- Accessory Packages:
  - Electrician's Package
  - Plumber's Package
  - JLG® Workstation
  - Panel Carrier Accessory
  - Pipe Rack Accessory<sup>1</sup>
  - Plant Maintenance Package

1. Not available on the 1930ES.

### Dimensions

All dimensions are approximate.

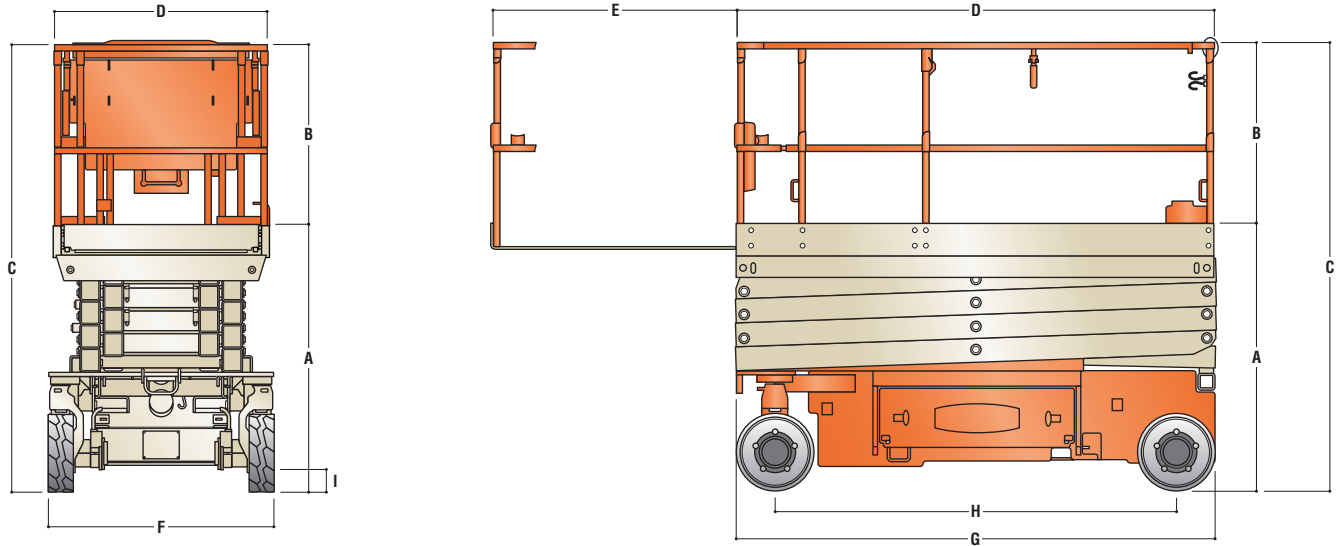

#### A. Platform Height-Lowered

|        |        |
|--------|--------|
| 1930ES | 0.86 m |
| 2032ES | 1.10 m |
| 2632ES | 1.23 m |
| 2646ES | 1.26 m |
| 3246ES | 1.26 m |

#### B. Platform Railing Height

|           |        |
|-----------|--------|
| ES Series | 1.14 m |
|-----------|--------|

#### C. Overall Height-Rails Lowered

|               |        |
|---------------|--------|
| 1930ES        | N/A    |
| 2032ES        | 1.80 m |
| 2632ES        | 1.94 m |
| 2646ES/3246ES | 1.97 m |

#### D. Platform Size

|               |               |
|---------------|---------------|
| 1930ES        | 0.76 x 1.87 m |
| 2032ES/2632ES | 0.76 x 2.3 m  |
| 2646ES/3246ES | 1.12 x 2.5 m  |

#### E. Platform Extension

|                      |        |
|----------------------|--------|
| 1930ES/2032ES/2632ES | 0.9 m  |
| 2646ES/3246ES        | 1.27 m |

#### F. Overall Width

|               |        |
|---------------|--------|
| 1930ES        | 76 cm  |
| 2032ES/2632ES | 81 cm  |
| 2646ES/3246ES | 1.17 m |

#### G. Overall Length

|               |        |
|---------------|--------|
| 1930ES        | 1.87 m |
| 2032ES/2632ES | 2.3 m  |
| 2646ES/3246ES | 2.5 m  |

#### H. Wheelbase

|               |        |
|---------------|--------|
| 1930ES        | 1.6 m  |
| 2032ES/2632ES | 1.88 m |
| 2646ES/3246ES | 2.09 m |

#### I. Ground Clearance

|                      |         |
|----------------------|---------|
| 1930ES/2032ES/2632ES | 8.8 cm  |
| 2646ES/3246ES        | 12.7 cm |