


JLG 30AM

PUSH AROUND VERTICAL LIFT

alfasi hire

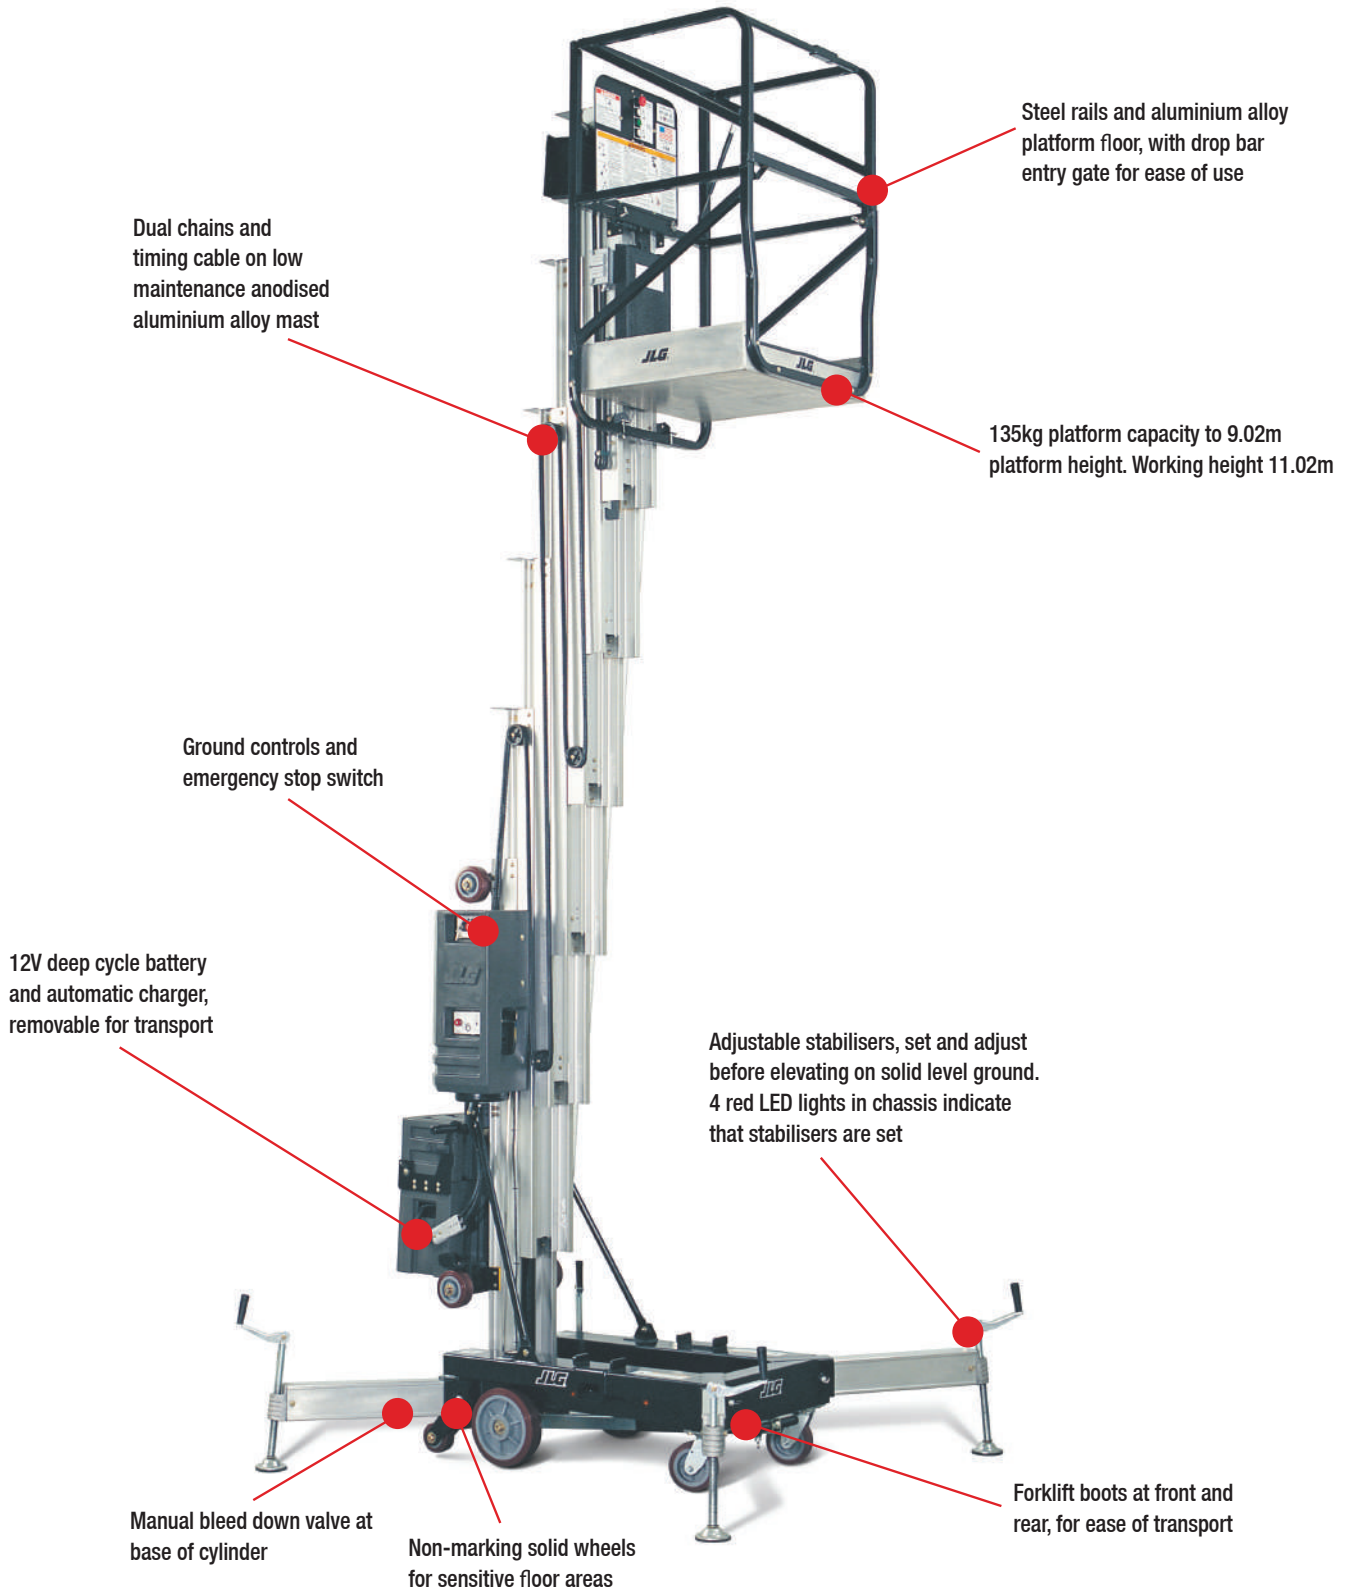

alfasi hire

1300 55 1108

www.alfasihire.com.au

QUESTIONS TO ASK

- What are the ground conditions in the work area?
- What are the floor load requirements and access to the site?
- What is the working height needed for the job?
- Is there 240V AC power available for charging?
- Is indoor and flat hard support surface needed?

KEY SELLING POINTS

- Work in tight and confined vertical areas
- 4 easy fit outriggers with interlock switch and telltale light indicating each outrigger is locked and set
- Base can be levelled on outriggers
- Dual chain vertical mast lift
- Non-marking solid tyres
- 1 x 12V DC deep cycle battery
- Removable SCR automatic battery charger for quick recharging

APPLICATIONS

- Facilities maintenance
- Electricians for lighting tube/globe replacements
- All maintenance work
- Factory fit outs in tight areas
- Ideal warehouse use between racking and narrow aisle areas
- Hospitals, schools and offices for suspended ceiling maintenance

SPECIFICATIONS

Performance:

Platform Height (max.)	9.02m
Working Height	11.02m
Lift Time	75 sec
Lower Time	39 sec
Platform Capacity Standard	135kg

Dimensions:

Stowed Length	1.32m
Stowed Height	1.97m
Stabiliser Footprint Length	1.89m
Stabiliser Footprint Width	1.81m

Platforms:

Standard Platform Type	Steel Rail/Alloy Floor
Overall Width	0.74m
Standard Platform Size - (WxL)	0.66 x 0.66m
Chassis Length	1.19m
Platform Entry Height	0.48m

Power:

Power Source	Battery
DC Voltage	12V
DC Power	93 Amp hr

Weights and Capabilities:

GVW AC	404kg
GVW DC	427kg