

alfasi hire

Specialising in dry hire of cranes,
EWPs, forklifts and telehandlers



HIRE16
Connecting People



HIRE INDUSTRY EXCELLENCE AWARDS

Rental Company of the Year
WINNER 2016





alfasi hire

08

Crawler Cranes

15

Mini Crawler Cranes

16

Rough Terrain Cranes

18

Truck Cranes

19

All Terrain Cranes

21

Pick & Carry Cranes

24

The Alfasi Hire Difference

26

Electric Scissor lifts

27

Narrow Electric Scissor Lifts

28

Large Electric Scissor Lifts

29

Speed Levels

30

Rough Terrain Scissor Lifts

32

Electric Articulating Boom Lifts

33

Rough Terrain Articulating Boom Lifts

35

Rough Terrain Telescopic Boom Lifts

36

Large Boom Lifts

37

Hybrid Boom Lifts

38

Telehandlers

42

Forklifts

43

Vertical Lifts

44

Spider Lifts

48

Towables

49

General Hire

50

Service Vehicles & Trucks

BUREAU VERITAS
Certification

Certification

Awarded to

ALFASI EQUIPMENT HIRE PTY LTD**73-79 WATERVIEW CLOSE, DANDENONG SOUTH, VIC, 3175, AUSTRALIA
AND SITES AS PER ATTACHED APPENDIX**

Bureau Veritas certify that the Management System of the above organisation has been audited and found to be in accordance with the requirements of the management system standards indicated below

STANDARD

ISO 9001:2008

SCOPE OF SUPPLY

THE DRY HIRE OF CRANES, ACCESS, MATERIALS HANDLING AND OTHER PLANT AND EQUIPMENT, NATIONALLY, TO THE MINING AND RESOURCE SECTORS, CONSTRUCTION, INFRASTRUCTURE, TELECOMMUNICATIONS, GOVERNMENT, EVENTS, INDUSTRIAL MAINTENANCE, WAREHOUSING AND OTHER ASSOCIATED INDUSTRIES. THIS ALSO INCLUDES ADDITIONAL SERVICES SUCH AS PLANT MAINTENANCE, INSPECTION, TRANSPORTATION AND TRAINING AS WELL AS TECHNICAL SUPPORT.

Original Approval Date: **17 June 2014**

Subject to the continued satisfactory operation of the organisation's Management System,
this certificate is valid until: **16 June 2017**

To check the validity of this certificate please call tel. **Bureau Veritas Australia Pty Ltd**

Further clarification regarding the scope of this certificate and the applicability of the Management System requirements may be obtained by consulting the organisation.

Certificate Number: **AU001107-1**Date: **17 June 2014**

Andrew Mortimore
General Manager - Bureau Veritas Certification



Managing office: Bureau Veritas Pty Ltd, 3/435 Williamstown Road,
Port Melbourne, Victoria, 3207

Issuing office: Bureau Veritas Pty Ltd, 3/435 Williamstown Road,
Port Melbourne, Victoria, 3207

BUREAU VERITAS
Certification

Certification

Awarded to

ALFASI EQUIPMENT HIRE PTY LTD**73-79 WATERVIEW CLOSE, DANDENONG SOUTH, VIC, 3175, AUSTRALIA
AND SITES AS PER ATTACHED APPENDIX**

Bureau Veritas certify that the Management System of the above organisation has been audited and found to be in accordance with the requirements of the management system standards indicated below

STANDARD

AS-NZS 4801:2001

SCOPE OF SUPPLY

THE DRY HIRE OF CRANES, ACCESS, MATERIALS HANDLING AND OTHER PLANT AND EQUIPMENT, NATIONALLY, TO THE MINING AND RESOURCE SECTORS, CONSTRUCTION, INFRASTRUCTURE, TELECOMMUNICATIONS, GOVERNMENT, EVENTS, INDUSTRIAL MAINTENANCE, WAREHOUSING AND OTHER ASSOCIATED INDUSTRIES. THIS ALSO INCLUDES ADDITIONAL SERVICES SUCH AS PLANT MAINTENANCE, INSPECTION, TRANSPORTATION AND TRAINING AS WELL AS TECHNICAL SUPPORT.

Original Approval Date: **17 June 2014**

Subject to the continued satisfactory operation of the organisation's Management System,
this certificate is valid until: **16 June 2017**

To check the validity of this certificate please call tel. **Bureau Veritas Australia Pty Ltd**

Further clarification regarding the scope of this certificate and the applicability of the Management System requirements may be obtained by consulting the organisation.

Certificate Number: **AU001106-1**Date: **17 June 2014**

Andrew Mortimore
General Manager - Bureau Veritas Certification



Managing office: Bureau Veritas Pty Ltd, 3/435 Williamstown Road,
Port Melbourne, Victoria, 3207

Issuing office: Bureau Veritas Pty Ltd, 3/435 Williamstown Road,
Port Melbourne, Victoria, 3207

alfasi hire

Alfasi Hire is a specialist crane dry hire company that provides a national service and boasts the newest crane fleet in the market. Constantly investing in cranes from the leading brands such as Liebherr, Demag, Maeda, Tadano, Grove-Manitowoc and Franna. We are able to provide dry hire lifting solutions for your projects.

Alfasi Hire benefits from being part of the Alfasi Group and its exposure to numerous high profile construction and infrastructure projects where its cranes are often used alongside our boom lifts and scissor lifts. We have the systems required to cater for large projects including Quality Assurance, Environmental and Occupational Health & Safety requirements.

Whilst Alfasi has been operating cranes for over three decades, Alfasi Hire commenced as a complete stand alone hire operation in 2005 and has grown ever since. In particular we also offer access equipment, telehandlers and a range of other general equipment as a complement to the crane dry hire. Our fleet of access equipment and telehandlers now exceeds 1,000 machines and growing.

Our range of cranes is from crane capacity of 5t all the way through to our 300t pin jib crawler cranes. Over the coming years Alfasi Hire will continue to add additional cranes to its fleet in accordance with our client's requirements. If we do not yet own the crane you need we will source it for you or purchase it.

cranes





LIEBHERR LR1300SX 300t PIN JIB CRAWLER CRANE

- Main boom 65m (SX Heavy Boom)
- Luffing jib 101m
- Maximum combination 172m
- Line pull 16t
- Auxiliary jib 36t capacity
- Self erection capability
- Remote control camera on boom head

Additional Features:

- 172m max boom combination (longest in class)
- 98m max main boom (longest in class)
- Self erecting system
- Wind farm erection system
- Fast erection times
- Derrick system or suspended counterweight for enhanced lifting capability
- Modular systems (interchangeable boom and components)
- Euromot III engine environmentally friendly (highest emission standards)
- Litronic Advanced diagnostic system
- Economical transport (fly sections transported inside main boom)
- Lidat GPRS system
- Superlift / derrick capability



LIEBHERR LR1300 300t PIN JIB CRAWLER CRANE

Capacity & Reach:

- Main boom 98m
- Luffing jib 113m
- Line pull 15t
- Auxiliary jib 36t capacity
- Maximum combination of 172m boom

Additional Features:

- 172m max boom combination (longest in class)
- 98m max main boom (longest in class)
- Self erecting system
- Wind farm erection system
- Fast erection times
- Derrick system or suspended counterweight for enhanced lifting capability
- Modular systems (interchangeable boom and components)
- Euromot III engine environmentally friendly (highest emission standards)
- Litronic Advanced diagnostic system
- Economical transport (fly sections transported inside main boom)
- Lidat GPRS system
- Superlift / derrick capability



LIEBHERR LR1160 160t PIN JIB CRAWLER CRANE

Capacity & Reach:

- Main boom 69.8m
- Fixed jib 32m
- Luffing jib 49.1m
- Line pull 12t
- Auxiliary jib 24t capacity (enabling 2 rope falls on auxiliary hook)
- Maximum combination of 109.9m boom

Transport and Rigging:

- Self erection system
- Fast erection time
- Economical transport (jib sections within main boom)
- Modular and inter-changeable boom components

Additional Features:

- 1000mm wide flat track shoes
- Proportional operating controls
- Graphical easy to understand interface for operator
- Cabin tilting system
- 270kW Engine environmentally friendly complying with EC 97/68 stage III standards
- Online load calculations & planning including track loads
- Compliant to highest safety standards of EN13000 including integrated data recorder



HITACHI SUMITOMO SCX1500-2 150t PIN JIB CRAWLER CRANE

- 150t Capacity
- 75m Main boom
- 28m of Fly jib
- 128t Operating weight
- Rope line speed of 110m/minute
- Advanced clutchless multiple wet disk brake for continuous heavy duty operation
- Fitted with secondary brake to comply with Workcover Victoria requirements for man box operations
- Negative brake system to reduce operator fatigue and enhance safety
- Enhanced operator comfort with such features as large cab sliding door, slidable control station and seat, specially tailored EPC system and armchair control station with drum rotation sensors
- Easy to assemble and disassemble thanks to counterweight with horizontally split design and 'hook on design' with hydraulic removal jointpins for the crawler side frames



LIEBHERR LR1130 130t PIN JIB CRAWLER CRANE

Capacity & Reach:

- 62m Main boom
- Fixed jib 32m
- Luffing jib 49.1m
- Line pull 12t
- Auxiliary jib 24t Capacity (enabling 2 rope falls on auxiliary hook)
- Maximum combination of 102.1m boom

Transport and Rigging:

- Self erection system
- Fast erection time
- Economical transport (jib sections within main boom)
- Modular and inter-changeable boom components

Additional Features:

- 1200mm Wide flat track shoes
- Proportional operating controls
- Graphical easy to understand interface for operator
- Cabin tilting system
- 270kW Engine environmentally friendly complying with EC 97/68 stage III standards
- Online load calculations & planning including track loads



LIEBHERR LR1100 100t PIN JIB CRAWLER CRANE

Capacity & Reach:

- Main boom 65m
- Fixed jib 32m
- Luffing jib 49.1m
- Line pull 12t
- Auxiliary jib 24t capacity (enabling 2 rope falls on auxiliary hook)
- Maximum combination of 90.1m boom


Transport and Rigging:

- Self erection system
- Fast erection time
- Extendable tracks
- Transportable with tracks fitted at 3.5m wide
- Economical transport (jib sections within main boom)
- Modular and inter-changeable boom components

Additional Features:

- 900mm Wide flat track shoes
- Proportional operating controls
- Graphical easy to understand interface for operator
- Cabin tilting system
- 270kW Engine environmentally friendly complying with EC 97/68 stage III standards
- Online load calculations & planning including track loads



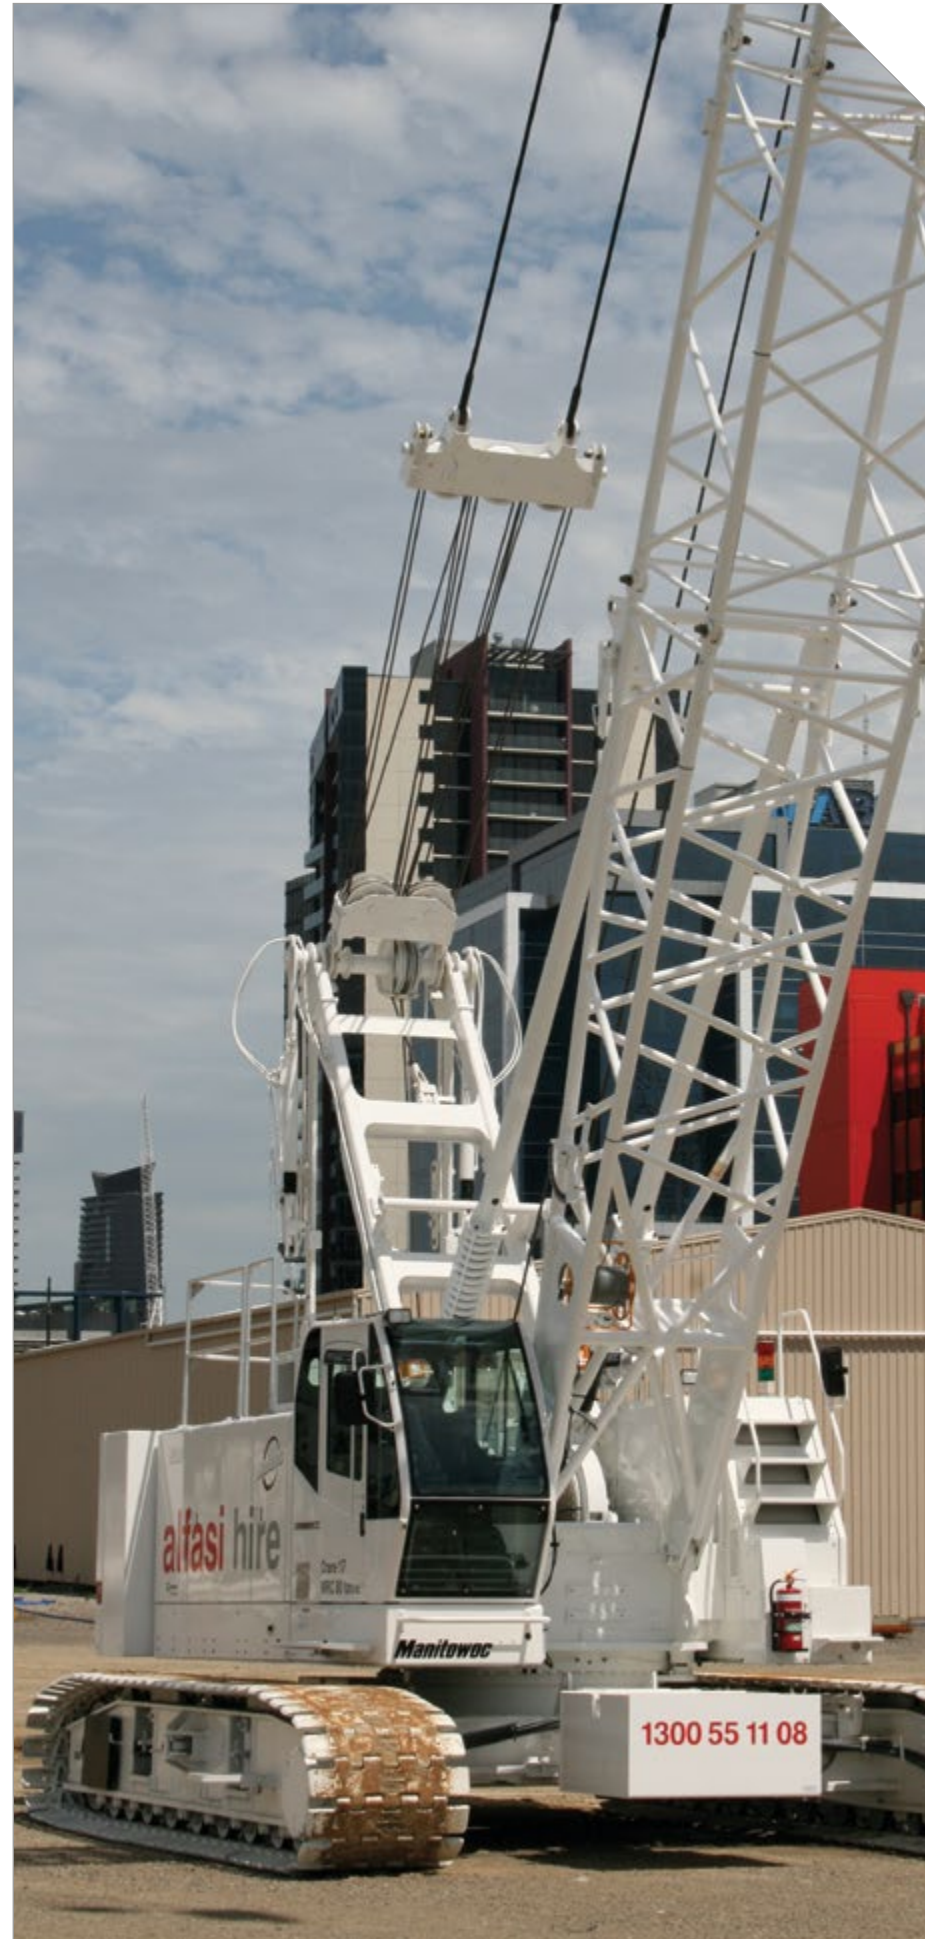

MANITOWOC 8500 80t PIN JIB CRAWLER CRANE

Capacity & Reach:

- Main boom 61m
- Fixed jib 18.3m
- Line pull 7.7t
- Rooster jib
- Maximum combination of 73.2m boom

Transport and Rigging:

- Removable counter-weight componentry
- Efficient load plan capability for transport
- Extendable tracks
- Transportable with tracks fitted at 3.5m wide

Additional Features:

- 914mm Wide track shoes
- Proportional operating controls
- Graphical easy to understand interface for operator
- 159kW Engine

MAEDA LC785M-8B 5t MINI CRAWLER CRANE

- 15.63m Main boom
- Fold out jib 3.0m/4.7m
- 2,350mm wide
- Pick and carry 2,000kg
- Weight 9,700kg
- Minimal tail swing
- Levelling blade to clear your own work area



MAEDA LC1385M-8B 6t MINI CRAWLER CRANE

- 16.25m Main boom
- 5.16m Fixed fly jib
- 2,490mm wide
- Pick and carry 2,000kg
- Weight 15,640kg
- 22m Maximum combination
- Levelling blade to clear your own work area





TADANO GR800EX 80t ROUGH TERRAIN CRANE

- 80t Capacity
- 5 Section main boom 12m to 47.0m
- Extension speed 35m in 160s
- 17.7m Jib
- Gross vehicle mass 51.4t
- Maximum travelling speed 39km/h
- Gradeability 30%
- Single line speed 149m/minute



GROVE RT880E 75t ROUGH TERRAIN CRANE

- 75t Capacity
- 4 section main boom 12.6m to 39.0m
- Extension speed 21.3m in 91s
- 17.7m Offsettable lattice swingaway extension jib
- 12.2m of extension inserts
- Maximum tip height of 70.6m
- Gross vehicle mass 49.06t
- Maximum travelling speed 35km/h
- Gradeability 75%
- Single line speed 156m/minute
- Cabin can be tilted up 20 degrees for operator comfort
- 205kw Tier III Cummins diesel engine



TADANO GT-600EX 60t TRUCK MOUNT CRANE

- 60t Capacity
- 43m Main boom
- 15.2m Fixed jib (5°, 25° and 45°)
- IAP endorsed
- Road registered
- Maximum gradient: 58%
- 2-staged bi-hold jib: 8.8/15.2m
- Maximum travelling speed: 84km/h
- Multistage transmission: 9-speed transmission forward
- Differential lock
- Emergency steering pump for greater safety
- Tool box



LIEBHERR LTM1055-3.2 55t ALL TERRAIN CRANE

- 40m Telescopic boom
- 16m Double swing-away jib
- 36t Total weight including 7t counterweight at 12t axle load
- Active, speed depending rear axle steering
- Sensitive working due to the electronic crane control
- Road registered and IAP approved



LIEBHERR LTM1100-4.2 100t ALL TERRAIN CRANE

- Main boom 60m
- Fixed fly 19m
- 10.2t Capacity at maximum boom length
- Great operational flexibility due to many varying configurations
- Active, speed depending rear axle steering for excellent road handling
- Air operated disk brakes
- 5 steering programs
- Bluetooth controller for safe and efficient setup
- Road registered and IAP approved

TEREX DEMAG AC100-4L 100t ALL TERRAIN CRANE

- Main Boom 59.4m
- Fixed Fly 19m
- Highest lifting capacities of any 4 axle 100t Crane
- 5.4t Counterweight with 12t axle load
- Most variable main boom extension system in its class
- Second winch fitted
- Road Registered and IAP approved



TEREX DEMAG AC140 140t ALL TERRAIN CRANE

- Main boom 60m
- Fixed fly 17m
- 8.3t counterweight carried on the crane giving just 12t axle load
- 39t Maximum counterweight combination
- 60m main boom and optional 9.1m to 33m boom extension
- State-of-the-art engine and transmission ensure high travel comfort
- Speed-dependent rear axle steering for increased manoeuvrability and driving stability
- Innovative IC-1 crane control system with touchscreen
- Road Registered and IAP approved



TEREX FRANNA MAC 25-4 25t FRANNA CRANE

- 25t Capacity
- Extra Superlift C/W for greater capacities
- Road registered
- 18.4m Full power boom
- 15t Spreader bar
- Mine spec including handrails to rear body
- Spare wheel
- Terex LMI dynamic rated capacity system for increased capacities
- New rear cabin door
- GPS & reverse camera system
- Waeco 30L fridge



TEREX FRANNA AT-20-III 20t FRANNA CRANE

- 20t Capacity
- Pick and carry crane
- Road registered
- 17.9m Main boom
- 3.0m Fixed fly
- 15t Spreader bar

Additional Features:

- Lincoln central greasing
- 3m Fly jib
- Handrail to rear body
- Filler cap lock
- Fire extinguisher
- Spare wheel
- Tool box bins



alfasi hire

Alfasi Hire's points of difference are its choice and specification of the best equipment in each class, 24 hour / 7 day service, ability to work in any location and to understand the strict Occupational Health and Safety requirements that apply to today's work place.

With now over 2,000 pieces of EWPs, forklifts, telehandlers and various other hire equipment, Alfasi Hire now has one of the most comprehensive and modern fleets of this type of equipment in Australia. This is supported by staff, service technicians and branches in Victoria, New South Wales and Queensland.

In order for us to remain at the forefront of our industry, Alfasi Hire is committed to continual improvement and reinvestment. This goes well beyond simply purchasing the best equipment but includes such things as continual modification of our machines to the latest

mine specifications including MDG15 and BMA across our fleet, as well as continuous improvement of our Quality Assurance, Occupational Health and Safety and Environmental systems, as well as investing in the latest technology to provide the most effective and efficient customer service. Similarly our staff and service team are constantly undergoing continual training not only in the latest equipment but also OH&S and various other training courses.

Lastly, Alfasi Hire's growth is based on the principle of fostering and maintaining long term relationships with our customers and obtaining a deep understanding of their business and hire requirements. We often work with our customers on providing them access and lifting solutions utilising the expertise of our staff and from our leading manufacturers.

Alfasi Hire is your first choice for access, lifting and material handling dry hire.

elevated work platforms, forklifts & telehandlers



the **alfasi** hire difference

1 Disconnect on board generator and removal of belt (optional)

2 Skyguard Crash Protection

3 Work Cover machine design registration

4 12 Months service history

5 Mesh around lower half of basket

6 All controls have legible decals

7 Emergency stop button (one at ground and one on basket)

8 4 Pole lockable isolator with ID decal (red)

9 All main battery cables in split tubing

10 Extreme hose separation hydraulic to electrical (optional)

11 Rubber boot covering all exposed electrical terminals

12 Separation of electrical harnesses using P-clamps (optional)

13 Isolate ground and basket power outlets with isolation padlock (optional)

14 Jump start point (350 Anderson connector)

15 Starter motor lockable isolator with ID decal (yellow)

16 Steel braided fuel hose

17 Turbo sock / cover

18 Pressure relieving radiator cap (mine safe red lever)

19 Guarding on all rotating parts

20 Separation of fuel hoses using P-clamps (optional)

21 Hydraulic accumulator testing (optional)

22 80 ABE minimum 4.5kg fire extinguisher with ID decal

23 2 x Call up ID (45mm thick and 200mm high lettering)

Burst protection on hoses at fly boom for operator **24**

High visibility tape on basket, boom and machine **25**

Separation of hydraulic hoses using P-clips (optional) **26**

PPE decals (entire machine) **27**

Spiral wrapped lower exposed hydraulic hoses **28**

Wheel nut tension indicator **29**

Wheel chocks **30**





JLG 1230ES
3.66m - 12'

- Transport in standard lifts
- Non marking tyres
- High angle steering provides excellent manoeuvrability
- Access through standard doorways
- Weight 790kg
- Platform capacity 227kg



JLG 1930ES
5.72m - 19'

- Slip resistant deck
- Non marking tyres
- High angle steering provides excellent manoeuvrability
- Access through standard doorways
- Weight 1,570kg
- Platform capacity 120/230kg
- Outdoor rated



GENIE GS-1932
5.79m - 19'

- Slip resistant deck
- Access through standard doorways
- Non marking tyres
- Weight 1,500kg
- Platform capacity 227kg



HAULOTTE OPTIMUM 8
5.76m - 19'

- Slip resistant deck
- Drivable at full height
- Non marking tyres
- Access through standard doorways
- Weight 1,420kg
- Platform capacity 230kg



GENIE GS-2046
6.10m - 20'

- Slip resistant deck
- Larger working platform
- Non marking tyres
- Weight 1,974kg
- Platform capacity 544kg



JLG 2646ES
7.92m - 26'

- Non marking tyres
- Slip resistance surface
- Larger platform and satisfies heavier lifting requirements
- Weight 2,600kg
- Platform capacity 230/450kg
- Outdoor rated



GENIE GS-2646
7.92m - 26'

- Non marking tyres
- Slip resistance surface
- Larger platform and satisfies heavier lifting requirements
- Weight 2,447kg
- Platform capacity 113kg/450kg
- Outdoor rated



GENIE GS-3246
9.68m - 32'

- Non marking tyres
- Roll out deck
- Platform capacity 318kg
- Weight 2,812kg
- Outdoor rated



JLG 3246ES
9.68m - 32'

- Slip resistant deck
- Non marking tyres
- Extra elevation for indoor applications
- Weight 2,770kg
- Platform capacity 320/450kg
- Outdoor rated



**JLG 2630ES/
2632ES**
7.74m - 26'
(NARROW)

- Non marking tyres
- Slip resistant deck
- Fits through narrow aisles and doorways
- Weight 2,160kg
- Maximum lifting capacity 230kg



GENIE GS-2632
7.92m - 26'
(NARROW)

- Non marking tyres
- Slip resistant deck
- Fits through narrow doorways
- Weight 1,956kg
- Maximum lifting capacity 227kg



GENIE GS-3232
9.75m - 32'
(NARROW)

- Non marking tyres
- Slip resistant deck
- Fits through narrow aisles
- Weight 2,352kg
- Maximum lifting capacity 227kg
- Inboard stabilisers

JLG M3369LE 10.06m - 33'

- All-Wheel Drive, superior performance on slab or rough terrain
- Drive capability at maximum height
- Outriggers
- Onboard generator for recharging batteries
- Zero emissions
- Weight 4,430kg
- Platform capacity 450kg



JLG M4069LE 12.19m - 40'

- All-Wheel Drive, superior performance on slab or rough terrain
- Drive capability at maximum height
- Onboard generator for recharging batteries
- Outriggers
- Zero emissions
- Weight 5,520kg
- Platform capacity 360kg



GENIE GS2668E 7.9m - 26'

- Large overall deck area
- Platform width of 1.7m
- 567kg Platform capacity
- Non marking tyres
- 1.5m roll out deck
- Long life batteries



HAULOTTE COMPACT 14 11.8m - 40'

- Driveable at full height
- Extended platform
- 1.2m Wide
- Weight 3,170kg
- Load capacity 350kg



MEC 3084RT SPEED LEVEL

- Platform height 9m
- Lift capacity 680kg
- Gradeability 45%
- Able to elevate on up to a 14° slope
- Weight 3,400kg
- Diesel rough terrain
- Fast platform levelling on slopes
- Non marking tyres
- Quad-Trax 4WD power
- Non-skid metal deck construction
- Drives whilst elevated on fixed inclines up to 10°
- Perfect for tunnel or ramp work
- Platform levels on uneven surfaces without outriggers, keeping 4 wheels in contact with the ground for extra stability



MEC 3084 HYBRID SPEED LEVEL

- Platform height 9m
- Lift capacity 680kg
- Gradeability 45%
- Able to elevate on up to a 14° slope
- Electric rough terrain
- Fast platform levelling on slopes
- Non marking tyres
- Quad-Trax 4WD power
- Drives whilst elevated on fixed inclines up to 10°
- Perfect for tunnel or ramp work
- Platform levels on uneven surfaces without outriggers, keeping 4 wheels in contact with the ground for extra stability





GENIE GS-2668 RT 7.9m - 26'

- 4WD Superior rough terrain performance
- Automatic levelling outriggers
- Weight 3,486kg
- Platform capacity 567kg



HAULOTTE COMPACT 10 DX - 8.15m - 26'

- 4WD Superior rough terrain performance
- Automatic levelling outriggers
- Weight 3,530kg
- Platform capacity 565kg



GENIE GS-3268 RT 9.75m - 32'

- 4WD Superior rough terrain performance
- Automatic levelling outriggers
- Weight 4,153kg
- Platform capacity 454kg



HAULOTTE COMPACT 12 DX - 10.15m - 32'

- 4WD Superior rough terrain performance
- Automatic levelling outriggers
- Weight 4,080kg
- Platform capacity 450kg



GENIE GS-4069 RT 12.19m - 40'

- 4WD Superior rough terrain performance
- Automatic levelling outriggers
- Weight 5,241kg
- Platform capacity 363kg



GENIE GS-4390 RT 13.11m - 43'

- 4WD Superior rough terrain performance
- Fold down handrails
- Mega deck platform - 6.57m long fully extended (twin extension)
- Weight 7,692kg
- Platform capacity 680kg



GENIE GS-5390 RT 16.15m - 53'

- 4WD Superior rough terrain performance
- Mega deck platform - 6.57m long fully extended (twin extension)
- Access through standard doorways
- Weight 8,274kg
- Platform capacity 680kg



MEC 6092 RT 18.2m - 60'

- 20.1m Working height
- 540kg Lift capacity
- 4WD with hydraulic outriggers
- Dual extension deck - 7.5m deck length
- Onboard generator
- 40% Gradeability



JLG E300AJP
9.14m - 30'
(NARROW)

- Jib plus with 180° side to side range
- Ultra compact width 1.22m
- Horizontal outreach 6.10m
- Up and over height 3.99m
- Weight 6,895kg
- Platform capacity 230kg



GENIE Z34/22N
10.5m - 34'

- Non marking tyres
- Horizontal outreach 6.8m
- Up and over height 4.6m
- High angle steering provides excellent manoeuvrability
- Rolls through double standard doorways
- Weight 5,216kg
- Platform capacity 227kg



JLG M450AJ
13.72m - 45'

- Automatic traction control for on or off slabs
- Onboard genset
- Horizontal outreach 7.24m
- Weight 6,680kg
- Platform capacity 230kg

NIFTY HR17 (NARROW)

- Machine runs on battery
- Tough cage basket design
- SIOPS safety system standard
- Working height 15m
- Horizontal outreach 9.7m
- Platform capacity 225kg
- Weight 7,650kg
- Machine width 1.5m



NIFTY HR12

- 10.2m Platform height
- Horizontal outreach 6.1m
- 4WD Bi Energy
- Non marking tyres
- Great for indoor and outdoor applications
- Lightweight 3500kg
- SWL 200kg



JLG M600JP
18.40m - 60'

- All wheel drive and jib plus
- Quick charge genset and inverter, provide automatic charging of batteries and power for operating tools
- Jib plus with 180° side to side range
- Horizontal outreach 13.06m
- Weight 7,530kg
- Platform capacity 230kg

JLG E400AJP
12.19m - 40'
(NARROW)

- Solid non marking tyres
- Width 1.5m, horizontal reach 6.83m, up and over height 6.55m
- Jib plus with 180° side to side range
- Onboard genset
- Weight 7,760kg
- Platform capacity 230kg



JLG 340AJ
10.35m - 34'

- 4WD rough terrain
- Horizontal outreach 6m
- Zero tail swing for tight applications
- Weight 4,400kg
- Platform capacity 230kg
- 45% gradeability

GENIE Z34/22IC
10.6m - 34'

- 4WD Rough terrain
- 6.8m Horizontal outreach
- Up and over 4.6m high
- Zero tail swing for tight applications
- Weight 4,854kg
- Platform capacity 227kg



JLG 450AJ
13.8m - 45'

- 4WD rough terrain
- On board generator for power to platform
- Up and over 7.34m
- Horizontal outreach 7.47m
- Weight 7,430kg
- Platform capacity 230kg



JLG 510AJ
15.7m - 51'

- 4WD rough terrain
- On board generator for power to the boom basket
- Horizontal outreach 9.48m
- Weight 7,650kg
- Platform capacity 230kg



HAULOTTE HA16RTJ PRO

- 4WD and 4WS
- Front oscillating axle increases stability on uneven ground
- Platform height 14m
- Horizontal outreach 8.3m
- Load capacity 230kg
- Weight 6,650kg



JLG 800AJ 24.38m - 80'

- 4WD Superior and on board generator
- Horizontal outreach 15.8m
- Up and over 9.78m
- Quik stik provides optimum lowering & elevation
- Some models with crab steer
- Weight 15,220kg
- Maximum lifting capacity 227kg



JLG 600AJ 18.46m - 60'

- 4WD Rough terrain
- On board generator
- Up and over 8.1m
- Horizontal outreach 12.12m
- Some models with crab steer
- Weight 11,900kg
- Platform capacity 230kg



GENIE S45 13.7m - 45'

- 4WD
- Horizontal reach max 11.2m
- On board generator for power to basket
- Fitted with mine specification
- Gradeability 40%
- Weight 7,151kg



JLG 660SJ 20.12m - 66'

- 4WD and articulating jib
- 5.5kva generator
- Airline to platform
- Weight 13,500kg
- 45% Gradeability
- Platform capacity 230kg



JLG 460SJ 14.02m - 46'

- 4WD Superior rough terrain performance
- 360° Continuous turntable operation
- Weight 7,930kg
- Platform capacity 230kg
- On board generator



JLG 860SJ 26.21m - 86'

- 4WD and articulating jib
- 5.5 generator
- Air line to platform
- Suitable for SkyGlazier attachment
- 45% Gradeability
- Weight 17,130kg



HAULOTTE HT23 RTJ 20.6m - 67'

- 4WD and 4WS
- 22.5m Platform height
- Dual capacity basket 230kg or 450kg
- Raises to full height in 56 seconds
- On board generator with power to platform
- 40% Gradeability



GENIE S85 25.9m - 85'

- Fitted with mine specification
- Full time 4WD in both high speed and low
- On board genset
- Weight 17,563kg
- Platform capacity 227kg

HAULOTTE HA 32 PX 31.8m - 100'

- 21.3m outreach
- 250kg platform capacity
- 4WD
- Weight 20,700kg
- Continuous rotation

JLG 1350SJP 41.15m - 135'

- 4WD and 4WS
- 7kva generator
- Airline to platform
- Suitable for SkyGlazier attachment
- 45% Gradeability
- Weight 20,299kg
- 230kg/450kg basket cap

JLG 1500SJP 45.72m - 150'

- 4WD and SWD
- Telescopic jib (up to 7.62m)
- 5.5 kVa generator
- Clear Sky GPS
- 40% Gradeability
- Weight 21,772kg

GENIE Z135 41.15m - 135'

- 4WD and 4WS Superior and on board generator
- Horizontal outreach 21.26m
- Up and over 23.01m
- Quik stik provides optimum lowering & elevation
- Weight 20,366kg
- Platform capacity 272kg

JLG 1850SJ ULTRA BOOM 56.56m - 185'

- Largest self propelled boom lift available
- Platform height 56.56
- Horizontal outreach 24.38
- Telescopic jib up to 6.1m
- 14.6m stowed length
- On-board generator
- 40% Gradeability
- Up to 454kg platform capacity
- 4WD
- LED platform control display for easier operation

NIFTY HR17

- Hybrid machine runs on both battery and diesel
- Suitable for both indoor and outdoor use
- Non-marking tyres
- Tough cage basket design
- SIOPS safety system standard
- Working height 17m
- Horizontal outreach 9.3m
- Platform capacity 225kg
- Lightweight 5,000kg

NIFTY HR21

- AWD
- Tough cage basket design
- SIOPS safety system standard
- Platform height 18.8m
- Horizontal outreach 12.8m
- Load capacity 225kg
- Lightweight 6,500kg



MERLO P 25.6 **2.5t - 5.9m REACH**

- Lifting height 5.9m
- Maximum lifting capacity 2.5t
- 0.27m Ground clearance
- Available attachments include standard forks, jib & rotator



MANITOU MVT 628 **2.8t - 6.3m REACH**

- Manitou MVT-628 Turbo
- Road registered
- 3.91m turning radius
- 0.36m ground clearance



JLG 307 **3t - 7m REACH**

- Road registered, standard fork license required
- Comes with standard fork, 1m or 2m bucket



GENIE 3007 **3t - 7m REACH**

- Lifting height 7m
- Maximum lifting capacity 3t
- 0.50 Ground clearance
- 3.8m turning radius

HAULOTTE HTL 3510 **3.5t - 10m REACH**

- 3.7m Turning radius
- Reversing camera with night vision
- 42cm Ground clearance



MERLO P 36.10 **3.6t - 9.7m REACH**

- Lifting height 9.7m
- Maximum lifting capacity 3.6t
- 0.56m Ground clearance
- Available attachments include standard forks, jib & rotator



JLG 4017 4t - 17m REACH

- Lifting height 17m
- Maximum lifting capacity 4t
- Road registered
- Comes with standard fork, 1m or 2m bucket



HAULOTTE HTL 4017 4t - 17m REACH

- Reversing camera with night vision
- Lifting height 16.7m
- Maximum lifting capacity 4t
- 0.50m Ground clearance
- Available attachments include standard forks, jib & bucket



MANITOU MT 1740 SLT 4t - 17m REACH

- Maximum lifting height 16.65m
- Nominal capacity 4,000kg at 500mm
- Maximum forward reach 12.35m
- 4WD / 4WS
- Hydraulic stabilizers
- Frame levelling



MERLO P 40.17 4t - 17m REACH

- Lifting height 16.7m
- Maximum lifting capacity 4t
- 0.48m Ground clearance
- Available attachments include standard forks, jib, tyres & rotator

MERLO P 60.10 6t - 10m REACH

- Lifting height 9.55m
- Maximum lifting capacity 6t
- 0.48m Ground clearance
- Available attachments include standard forks, jib & rotator



TOYOTA 42-7FGR25 2.5t - 4.3m MAST

- 3 Stage mast
- Integral sideshift
- Gas and petrol
- Container mast



TOYOTA 42-7FG25 2.5t - 6m MAST

- 3 Stage mast
- Integral sideshift
- Gas and petrol



MANITOU MH 25-4T 2.5t - 3.3m 4WD 'BUGGIE'

- Sideshift
- Road registered
- 2.0m overall height



MANITOU M30-2 3.0t - 3.7m MAST

- 3 Stage mast
- 2WD Rough terrain forklift
- Sideshift
- Diesel 70kw turbo engine
- Lights and indicators



TOYOTA 32-8FG30 3.0t - 4.3m MAST

- Digital weight scale
- Integral sideshift
- Gas and petrol
- Non marking tyres



GENIE GR20 5.97m

- 7.8m working height
- Self drive
- Width 0.81m
- Fits through standard doorways
- Single man vertical lifter to 20'
- Weight 975kg



HAULOTTE QUICKUP 12 10.3m

- 12.3m work height
- Indoor operation
- 2.06 x 2.26 outrigger footprint
- Weight 457kg

AM15 4.5m & AM30 9.14m

- Push around vertical lifter with outriggers (AM30)
- 11.0m working height (AM30)
- Able to be transported on drop tray ute
- 1.89 x 1.81 outrigger footprint (AM30)




HAULOTTE STAR 8 6.2m

- Working height 8m
- Long life batteries
- 3m platform outreach
- Non marking tyres
- High angle steering
- Total weight of 2600kg
- Outdoor rated



JLG LIFT POD FS80 2.3m

- Portable, comes apart for easy transportation & manoeuvrability
- Lightweight 63kg

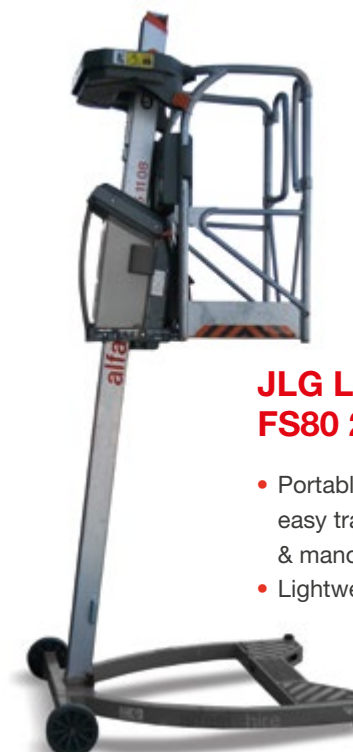

HAULOTTE STAR 10 8m

- Working Height 10m
- Drive at full height
- Narrow 0.99m base for tight applications
- Non marking tyres
- Extendible jib with 3m outreach





NIFTY SD210

- 4x4x4
- 19.30 Platform height
- Horizontal outreach 12.60m
- Four wheel drive / four wheel steer
- Lightweight 3950kg
- 45% Gradeability
- Independent suspension & turf tyres for minimal disruption to sensitive areas
- SWL 225kg



OMME 3700 RBDJ

- Maximum platform height 35.00m
- Maximum working outreach 14.00m
- Stowed height 2.00m
- Stowed length (without basket) 7.28m
- Stowed width with basket off 1.10m
- Weight 5,500kg
- Up to 250kg platform capacity
- Non marking rubber tracks
- Electric and diesel operation for indoor and outdoor applications
- Remote control operation
- Low overall weight
- Elevates to full height in under 3 minutes
- Drives through a normal double door
- Fully functioning fly jib
- Highest lightweight machine currently available in Australia

OMME 3150 RBDJ

- Maximum platform height 31.10m
- Maximum working outreach 12.60m
- Stowed height 2.15m
- Stowed length (without basket) 7.40m
- Stowed width with basket off 1.10m
- Weight 4,400kg
- 200kg platform capacity
- Non marking rubber tracks
- Electric and diesel operation for indoor and outdoor applications
- Remote control operation
- Low overall weight
- Drives through a normal double door
- Fully functioning fly jib



OMME 3000 RBDJ

- Max working height 31.00m
- Max working outreach 12.60m
- Stowed height 2.15m
- Stowed length 8.17m
- Stowed width 1.10m
- Operating width 4.25 / 3.45m
- Platform width 1.20m
- Gradeability 40%
- SWL 200kg
- Weight 4,400kg
- 31.8m Platform height
- Non marking expandable tracks
- Bi-energy
- Suitable for indoor applications such as foyers and tilted floors
- Travels through most doorways
- Deployment capability (with outriggers) up to 40%
- Radio control drive for ease of operation



OMME 2750 RXBDJ

- Maximum platform height 25.50m
- Maximum working outreach 15.50m
- Stowed height 2.27m
- Stowed length (without basket) 7.00m
- Stowed width with basket off 1.10m
- Weight 5,100kg
- Huge outreach of 15.5m at 11.0m high (best in class)
- Zero tail swing when elevated
- True knuckle boom operation with great 'up and over' capacity
- Up to 250kg platform capacity
- Non marking rubber tracks
- Electric and diesel operation for indoor and outdoor applications
- Variable position outriggers
- Remote control operation
- Low overall weight
- Drives through a normal double door
- Fully functioning fly jib

PLATFORM BASKET PB2210

- Max working height 21.70m
- Max working outreach 10.30m
- Stowed height 2.07m
- Stowed length 5.28m (without basket)
- Stowed width 0.98m (without basket)
- Outrigger deployed dimensions 4.19m x 4.14m
- Platform size 1.7m x 0.7m
- SWL 200kg (max)
- Weight 3,350kg

Standard Features:

- Light weight
- Removable basket
- Fly jib
- Remote control operation
- 240v operation for indoor use
- Great up and over reach



PLATFORM BASKET PB1890

- Max working height 17.70m
- Max working outreach 9.30m
- Stowed height 1.95m
- Stowed length 4.25m (without basket)
- Stowed width 0.85m (without basket)
- Outrigger deployed dimensions 3.90m x 3.33m
- Platform size 1.2m x 0.66m
- SWL 200kg (max)
- Weight 2,457kg

Standard Features:

- Light weight
- Removable basket
- Fly jib
- Remote control operation
- 240v operation for indoor use
- Fits through a standard door



PLATFORM BASKET PB1380

- Max working height 12.99m
- Max working outreach 7.70m
- Stowed height 1.99m
- Stowed length 3.69m (without basket)
- Stowed width 0.78m
- Outrigger deployed dimensions 2.91m x 2.95m
- Platform size 1.2m x 0.66m
- SWL 200kg (max)
- Weight 1,620kg

Standard Features:

- Extremely light weight
- Removable basket
- Fly jib
- Designed to fit in goods lifts



HINOWA GOLDLIFT TRACKED BOOM

- Max working height 14m
- Max platform height 11.94m
- 3.97m Stowed length
- 0.78m Wide (when retracted)
- 1.08m Wide (when tracks extended)
- Max work outreach 6.24m
- Weight 1,700kg
- Maximum gradient 24°
- Available on a trailer





GENIETZ50 TOWABLE 15.09 BOOM LIFT

- 17.09m working height
- Self drive
- 8.89m horizontal reach
- Non marking footpads
- Self levelling

TANDEM MACHINERY TRAILER

- Suitable for all brands of 12', 19' Electric Scissor and GR20
- Multiple applications



GENIE TZ34 TOWABLE BOOM LIFT

- 12.3m working height
- 5.59m horizontal reach
- 90° basket rotation
- Self levelling

NIFTY 150T TOWABLE BOOM

- Traction drive via joystick control
- Compact machine
- Platform height 12.7m
- Horizontal outreach 7.55m
- Width of machine with outriggers down 3.8m
- Load capacity 225kg
- Lightweight 1725kg



NIFTY 120T TOWABLE BOOM

- Traction drive
- Compact machine
- Platform height 10.2m
- Horizontal outreach 6.1m
- Width of machine with outriggers down 3.55m
- Load capacity 200kg
- Weight 1,195kg

5KVA & 8KVA GENERATORS

- Suitable to run small tools
- Portable
- Requires 2 men to lift



ATLAS COPCO 190cfm COMPRESSOR

- World leading compressor
- Hard hat cover
- Built in spill tray (110% containment)
- Proven Deutz engine
- Control panel isolation switch
- Air hoses available

ATLAS COPCO 130cfm COMPRESSOR

- World leading compressor
- Sturdy metal canopy
- Proven Deutz engine
- Air hoses available



LIGHT TOWERS

- 6 x high intensity LED light heads that are individually adjustable for both pan and tilt
- Very low fuel use of 1.2 litres per hour
- 250 hours of run time before refuel is required
- Programmable automatic start / stop times
- Mast rotates 360 degrees
- Retractable draw bar for compact storage and transport

PLATFORM LADDERS

Sizes

- 1.2m
- 1.8m
- 2.1m
- 2.4m
- Light and portable on wheels
- Ideal solution when self propelled scissor is not required



20KVA, 80KVA & 137KVA GENERATORS



GENIE SLC-18 DUCT LIFTER

- Heavy duty design
- Rolls through standard single doorways
- Working height 5.6m
- Load capacity 363kg



DIESEL WELDERS

- Various models available
- Weld leads and earth available





FORD RANGER SERVICE VEHICLES

- Mine site compliant
- 5 Star ANCAP rating



TILT TRAYS & PRIME MOVERS

- 420hp, 610hp & 700hp Volvo Prime Movers with sleeper cabins, suitable for country & interstate work



alfasi hire

Melbourne

73-79 Waterview Close
Dandenong South
Victoria 3175 Australia
Telephone: 1300 55 11 08
or +61 3 9799 8977
Email: melb@alfasihire.com.au

Brisbane

86 - 96 Depot Street
Banyo
Queensland 4014 Australia
Telephone: 1300 55 11 08
or +61 7 3370 2800
Email: qld@alfasihire.com.au

Sydney

21-23 Wurrook Circuit,
Caringbah
New South Wales 2229 Australia
Telephone: 1300 55 11 08
or +61 2 9589 6200
Email: syd@alfasihire.com.au

Darwin

71 Marjorie Street
Pinelands
Northern Territory 0829 Australia
Telephone: 1300 55 11 08
or +61 8 8932 8336
Email: darwin@alfasi.com.au

ISO 9001
AS/NZS 4801

BUREAU VERITAS
Certification



N° AU001106-1 / N° AU001107-1