



Performance

Platform Height—Elevated

ERT2669	8.0 m
ERT3369	10.0 m
ERT4069	12.3 m
ERT4769	14.3 m

Platform Capacity

ERT2669	680 kg
ERT3369	454 kg
ERT4069	363 kg
ERT4769	363 kg
— Capacity on Deck Extension	136 kg

No. Occupants (Indoor/Outdoor)

ERT2669	4/4
ERT3369	4/2
ERT4069	3/2
ERT4769	3/2

Lift/Lower Time

ERT2669	36/28 seconds
ERT3369	42/33 seconds
ERT4069	69/46 seconds
ERT4769	81/55 seconds

Maximum Drive Height

Full Height

Weight *

ERT2669	3,975 kg
ERT3369	4,510 kg
ERT4069	5,025 kg
ERT4769	6,430 kg

Drive Speed—Lowered

5.6 km/h

Drive Speed—Elevated

0.8 km/h

Gradeability

ERT2669	40%
ERT3369	40%
ERT4069	35%
ERT4769	30%

Turning Radius (Inside)

2 m

Turning Radius (Outside)

4 m

* Certain options or country standards will increase weight

Standard Specifications

Power Source

Drive (2WD)	AC Electric Drive
-------------	-------------------

Tyres

- Tyre size (non-marking) 26 x 12 Foam Filled

Hydraulic System

- Hydraulic Reservoir 50 L



Standard Features

- Hydraulic Leveling Jacks (Auto Level)
- Roll-out Deck Extension
- Moveable, Removable Platform Console Box
- Nickel Plated Pins, Yellow Zinc-Chromate Plated Fasteners
- Pin-Less Fold Down Rail System
- Platform Control Box with LCD Display, USB Charger and Phone Holster
- Self-closing Self-locking Gate
- Flashing Amber Beacon - LED
- Full Time Traction Control
- Lubrication-Free Scissor Arm Bushings
- Manual Descent
- Oscillating Front Axle
- Scissor Maintenance Prop
- Tie Down Lugs
- 26 x 12 Foam Filled Non-Marking Tyres
- 240V-AC Receptacle In Platform incl. ELCB
- 23 Amp Automatic, SCR Battery Charger
- 8 x 6V, 225 Amp-Hour Batteries (ERT2669, ERT3369)
- 8 x 6V, 310 Amp-Hour Batteries (ERT4069)
- 8 x 6V, 375 Amp-Hour Batteries (ERT4769)
- All Motion Alarm
- Descent Alarm
- Horn
- Hourmeter
- 2WD AC Drive System
- Proportional Lift and Drive
- LCD Display with LiftSense System
- Pin-based Load Sensing System
- Telematics-Ready Harness


Accessories & Options

- 26 x 12 Foam Filled Lug Tread Tyres
- 8 x 6V, 310 Amp-Hour Batteries (ERT2669, ERT3369)
- 8 x 6V, 375 Amp-Hour Batteries (ERT4069)
- White Noise Backup Alarm
- JLG CleanGuard
- Special Hydraulic Fluids
- Special Paint
- ClearSky™
- Operator Access Control
- Generator Set (Kubota Stage V OC60-E4) 6hp (4.5kW)
- Heavy Duty Pipe Racks



Dimensions

All dimensions are approximate.

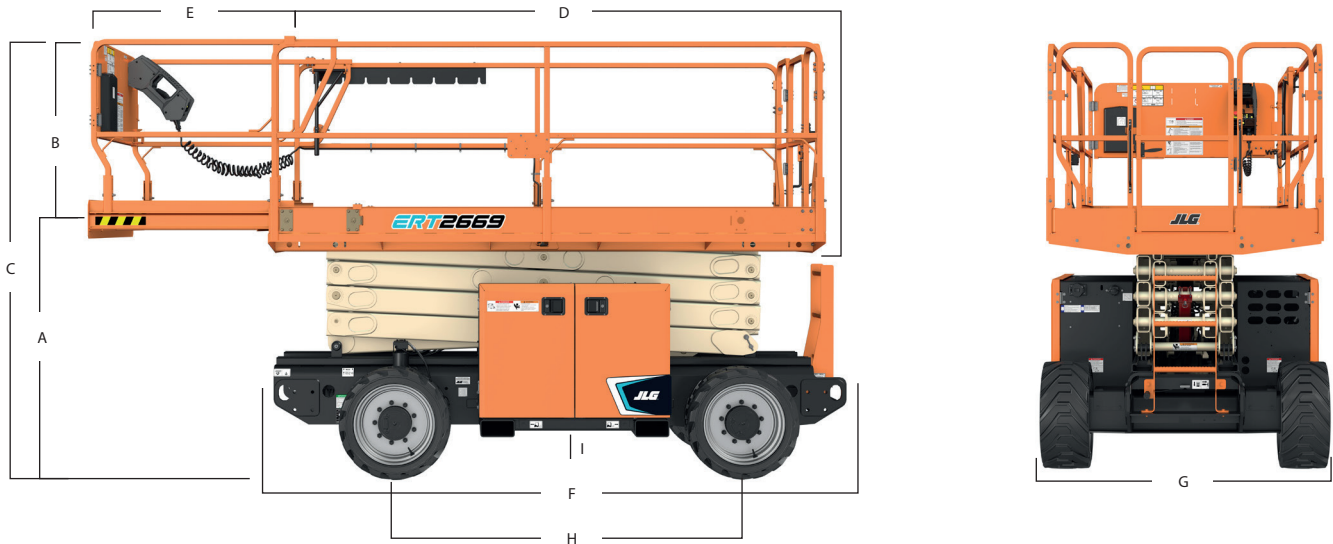

A. Platform Height – Lowered

ERT2669	1.30 m
ERT3369	1.46 m
ERT4069	1.46 m
ERT4769	1.62 m

B. Platform Railing Height*

	1.14 m
--	--------

C. Overall Height

ERT2669	
-Rails Up	2.46 m
-Rails Folded	1.89 m
ERT3369	
-Rails Up	2.61 m
-Rails Folded	2.05 m
ERT4069	
-Rails Up	2.62 m
-Rails Folded	2.05 m
ERT4769	
-Rails Up	2.77 m
-Rails Folded	2.21 m

D. Platform Dimensions

3.3 x 1.6 m

E. Platform Extension

1.07 m

F. Overall Machine Length

3.53 m

G. Overall Machine Width

1.76 m

H. Wheelbase

2.07 m

I. Ground Clearance

25.7 cm

1300 551 108 | efleet@alfasihire.com.au

alfasi group
hire & property

Carrum Downs (HQ)
(03) 8795 2999
vic@alfasi.com.au

Hunter Valley, NSW
(02) 9589 6200
hv@alfasi.com.au

Brisbane, QLD
(07) 3370 2800
qld@alfasi.com.au

Karratha, WA
(08) 6187 3000
wa@alfasi.com.au

alfasihire.com.au

Derrimut, VIC
(03) 8795 2999
vic@alfasi.com.au

Sydney, NSW
(02) 9589 6200
nsw@alfasi.com.au

Mackay, QLD
(07) 3370 2800
qld@alfasi.com.au