
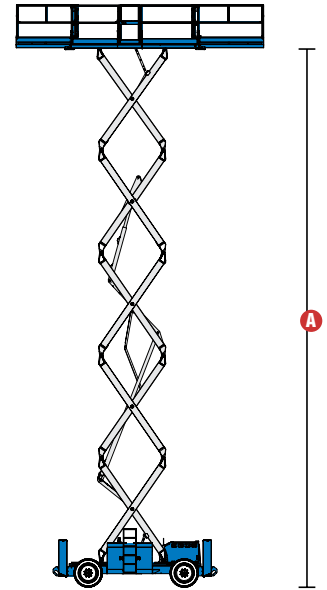



## Specifications

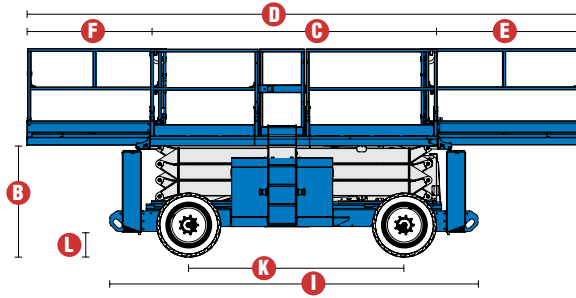

MODELS	GS™-4390 RT		GS™-5390 RT	
MEASUREMENTS	Metric	US	Metric	US
Working height maximum*	15.11 m	49 ft	18.15 m	59 ft
<b>A</b> Platform height maximum	13.11 m	43 ft	16.15 m	53 ft
<b>B</b> Platform height - stowed**	1.80 m	5 ft 11 in	2.02 m	6 ft 7.5 in
<b>C</b> Platform length:	3.98 m	13 ft 0.5 in	3.98 m	13 ft 0.5 in
outside, extended - single deck	5.34 m	17 ft 6.25 in	5.34 m	17 ft 6.25 in
<b>D</b> outside, extended - dual deck	6.57 m	21 ft 6.5 in	6.57 m	21 ft 6.5 in
<b>E</b> Slide-out platform extension deck - front	1.52 m	5 ft	1.52 m	5 ft
<b>F</b> Slide-out platform extension deck - rear	1.22 m	4 ft	1.22 m	4 ft
<b>G</b> Platform width - outside	1.83 m	6 ft	1.83 m	6 ft
<b>H</b> Height: stowed	2.93 m	9 ft 7.5 in	3.15 m	10 ft 4 in
stowed - rails lowered	2.25 m	7 ft 4.75 in	2.47 m	8 ft 1.25 in
<b>I</b> Length - stowed with outriggers	4.88 m	16 ft	4.88 m	16 ft
Length - extended: single deck	5.40 m	17 ft 8.5 in	5.40 m	17 ft 8.5 in
dual deck	6.57 m	21 ft 6.5 in	6.57 m	21 ft 6.5 in
<b>J</b> Width: standard tyres	2.29 m	7 ft 6 in	2.29 m	7 ft 6 in
high flotation tyres	2.57 m	8 ft 5 in	2.57 m	8 ft 5 in
<b>K</b> Wheelbase	2.84 m	9 ft 4 in	2.84 m	9 ft 4 in
<b>L</b> Ground clearance - centre	0.36 m	1 ft 2 in	0.36 m	1 ft 2 in

PRODUCTIVITY				
Maximum platform occupancy***	7	7	4	4
Lift capacity	680 kg	1,500 lbs	680 kg	1,500 lbs
Lift capacity - extension deck	227 kg	500 lbs	227 kg	500 lbs
Drive height	full height	full height	9.14 m	30 ft
Drive speed - stowed	8.0 km/h	5.0 mph	8.0 km/h	5.0 mph
Drive speed - raised	1.1 km/h	0.7 mph	1.1 km/h	0.7 mph
Gradeability - stowed****	50%	50%	40%	40%
Maximum outrigger leveling:	front to back	7°	7°	7°
side to side	12°	12°	12°	12°
Turning radius - inside	2.16 m	7 ft 1 in	2.16 m	7 ft 1 in
Turning radius - outside	5.33 m	17 ft 6 in	5.33 m	17 ft 6 in
Controls	proportional		proportional	
Drive	four wheel		four wheel	
Raise / lower speed	55 / 49sec	55 / 49sec	55 / 49sec	55 / 49sec
Tyres - non-marking foam-filled rough terrain	30 x 84 cm	12 x 33 in	30 x 84 cm	12 x 33 in

POWER				
Power source	Deutz D2011L03i 3 cylinder diesel 36kW (49hp), air cooled			
Auxiliary Power unit	12V DC		12V DC	
Fuel tank capacity	113.6L	30 gal	113.6L	30 gal
Hydraulic system capacity	113.6L	30 gal	113.6L	30 gal

WEIGHT****				
with outriggers	7,692kg	16,958lbs	8,274kg	18,241lbs

STANDARDS COMPLIANCE				
	ANSI A92.6, CSA B354.2, CE Compliance, AS 1418.10			

\*The metric equivalent of working height adds 2 m to platform height. U.S. adds 6 ft to platform height.

\*\*Based on RT tyres. Deduct 2 in (5.8 cm) for high flotation air-filled and non-marking tyres.

\*\*\*GS™-5390 CE/AUS market limited to 4 person platform occupancy.

\*\*\*\*Gradeability applies to driving on slopes. See operator's manual for details regarding slope ratings.

\*\*\*\*\*Weight will vary depending on options and/or country standards.

## Features

### STANDARD FEATURES

#### MEASUREMENTS

##### GS™-4390

- 15.11m (49 ft) working height
- Up to 680 kg (1,500 lbs) lift capacity

##### GS™-5390

- 18.15m (59 ft) working height
- Up to 680 kg (1,500 lbs) lift capacity

#### PRODUCTIVITY

- 3.98 m x 1.83 m (13 ft 0.5 in x 6 ft) steel frame platform with replaceable diamond plate aluminium deck
- Dual slide-out platform extension decks 1.52 m (5 ft) front and 1.22 m (4 ft) rear
- Proportional lift and drive
- Onboard diagnostic system
- Two self-closing gates
- 4WD
- Automatic leveling hydraulic outriggers
- Oscillating axle
- Positive traction control
- Four-wheel braking
- Slide-out engine tray
- Hydraulic oil cooler
- Tilt alarm
- Descent alarm
- Horn
- Hour meter
- Non-marking foam-filled rough terrain tyres
- Dual flashing beacons
- Motion alarm

#### POWER

- 12 V DC auxiliary power
- Deutz diesel 36 kW (49 hp)

### OPTIONS & ACCESSORIES

#### PRODUCTIVITY

- Air line to platform
- Pipe cradle (pair)
- High flotation foam-filled tyres 41 x 84 cm (16 x 33 in)
- Foam-filled rough terrain tyres
- Platform work lights

#### POWER OPTIONS

- 7 kVA Hydraulic generator (240 V/50 Hz)
- Cold weather package
- Arctic package
- Diesel scrubber/spark arrestor
- Diesel spark arrestor (without scrubber)
- 240 V power to platform

