



Exceptional productivity

- Working height up to 13.8m
- Driveable at full height
- Load capacity: 350 kg
- Robust, reliable, easy to maintain
- Extended platform
- Long working cycles

Optimum compactness


- 1.2m width
- Folding guardrails




TECHNICAL DATA

COMPACT 14

Working height	13.8 m
Platform height	11.8 m
Lift capacity	350 kg
A Platform length - outside	2.3 m
Platform length - extended	3.22 m
Length - extension	0.92 m
Platform width - outside	1.2 m
D Storage height	2.08 m
C Height - stowed	2.5 m
B Overall width	1.2 m
E Length	2.74 m
F Wheelbase	1.86 m
G Ground clearance - Centre	13 cm
Ground clearance - Pothole guards deployed	2 cm
Drive speed	0.9 - 2.8 km/h
Driveable at full height up to	11.8 m
Gradeability	23 %
Tilt	2° / 3°
Lift / lower speed	68 s / 54 s
Turning radius - outside	2.38 m
Tyres - non marking	15 x 5
Batteries	24 V - 255 Amph (C5)
Hydraulic system capacity	25 l
Weight	3175 kg

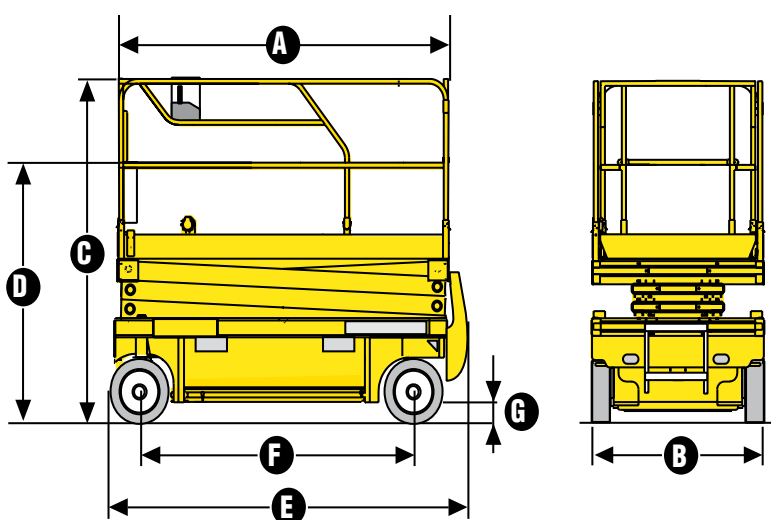

350 kg
770 lbs / 3x 

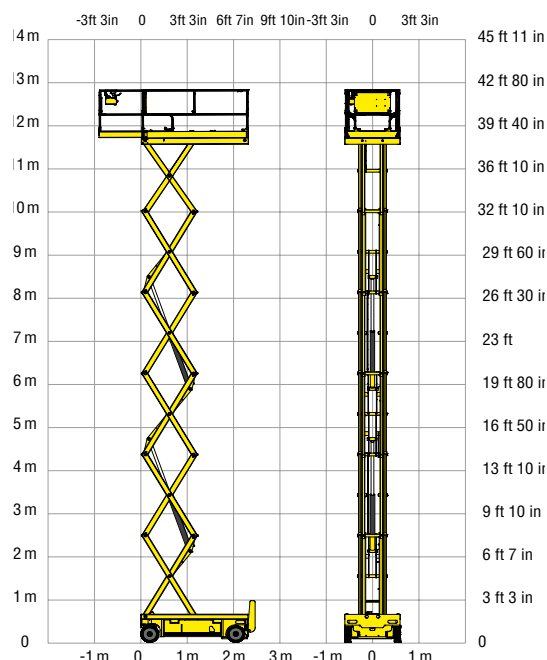

STANDARD EQUIPMENT

- ③ Pothole guards
- ③ Battery charge indicator
- ③ Proportional lift and drive
- ③ Removable control box in platform
- ③ Swing out component tray
- ③ Battery charger with automatic stop
- ③ Solid non-marking tyres
- ③ Brake release
- ③ Tilt controller
- ③ Load Management System in the platform
- ③ Manual platform lowering valve
- ③ Integrated forklift pockets
- ③ Towing hooks
- ③ Horn
- ③ Hourmeter

OPTIONS AND ACCESSORIES

- ③ Flashing light
- ③ Travel alarm
- ③ Working light
- ③ Power to platform
- ③ Biodegradable hydraulic oil
- ③ Centralised battery filling