

### Performance

Platform Height	45.75 m
Horizontal Outreach	24.38 m
Swing	360° Continuous
Platform Capacity-Restricted	450 kg
Platform Capacity-Unrestricted	230 kg
Platform Rotator	180° Hydraulic
Jib Length	4.62–7.62 m
Jib Range of Articulation	120° (+75, -45)
Weight <sup>1</sup>	21,772 kg
Drive Speed	4.5 km/h
Gradeability	40%
Turning Radius (Inside)	
Axles Retracted	4.4 m
Axles Extended	2.4 m
Turning Radius (Outside)	
Axles Retracted	6.8 m
Axles Extended	5.9 m

1. Certain options or country standards increase weight.

### Standard Specifications

#### Power Source

Diesel Engine		
Deutz TD2011L040	75 hp	56 kW
Fuel Tank Capacity	200 L	

#### Hydraulic System

• Hydraulic Tank Capacity	208 L
---------------------------	-------

#### Tyres

• Standard	445/50D710 24 ply Urethane-Filled
------------	-----------------------------------

### Standard Features

- Platform 0.91 m x 2.44 m
- Inward Self Closing Swing Gate
- Selectable Capacity Envelope
- Drive-Out Extendable Axles
- 180° Hydraulic Platform Rotator
- AC Receptacle in Platform
- Tilt Light and Alarm
- Swing-Out Engine Tray
- 12V-DC Auxiliary Power
- Hourmeter
- Control ADE® System
- Full-Time 4WD
- 3 Selectable Steering Modes
- Proportional Controls
- Gull-Wing Steel Hoods
- 445/50D710 Foam-Filled Rim Protector Lug Tread Tyres
- Platform Console Machine Status Light Panel\*
- Lifting/Tie Down Lugs
- All Motion Alarm
- Glow Plugs
- LCD Panel at Operator's Platform Control Console
- Flashing Amber Beacon
- 5.5kVA Generator
- Cylinder Bellows
- Tool Tray

\* Provides indicator lights at platform control console for system distress, fuel level, low fuel, 5 degree tilt light, and foot switch status.



- **More Capacity**—With a dual 450/230 kg capacity, the platform can handle more workers, tools or materials.
- **More Maneuverability**—Full-time four-wheel drive gets you over rough terrain.
- **Ease of Transport**—No oversized load permit needed.


### Accessories & Options

- .91 x 1.83 m Platform Entry
- Mesh to Mid Rail
- Light Package<sup>1</sup>
- Soft Touch System
- Special Hydraulic Oils
- Console Cover
- Corner Storage Tray
- ClearSky®
- SkyGuard™
- Pipe Rack
- Accessory Packages:
  - SkyWelder® Package
  - Nite Bright® Package
  - SkyGlazier®

1. Includes platform mounted worklights and drive/back-up lights.

## Dimensions

All dimensions are approximate.

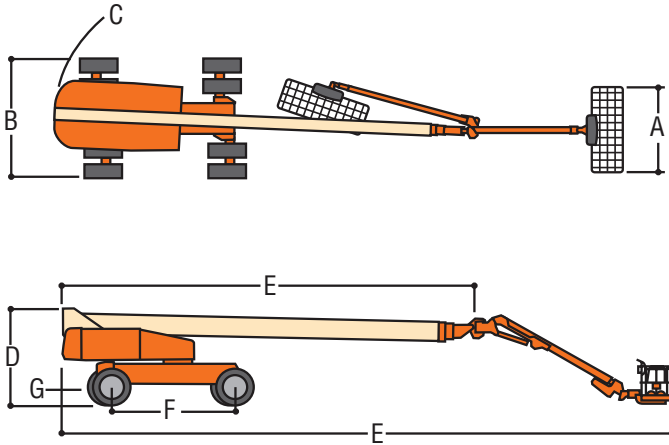

<b>A.</b> Platform Size	0.91 x 2.44 m
<b>B.</b> Overall Width Axles Retracted	2.49 m
Overall Width Axles Extended	3.81 m
<b>C.</b> Tailswing	1.67 m
<b>D.</b> Stowed Height	3.05 m
<b>E.</b> Overall Length Jib Stowed	13.11 m
Overall Length Jib Deployed	18.82 m
<b>F.</b> Wheel Base	3.81 m
<b>G.</b> Ground Clearance	
Axle	30 cm
Chassis	65 cm

## Load Chart

